




Features

Package Dimension

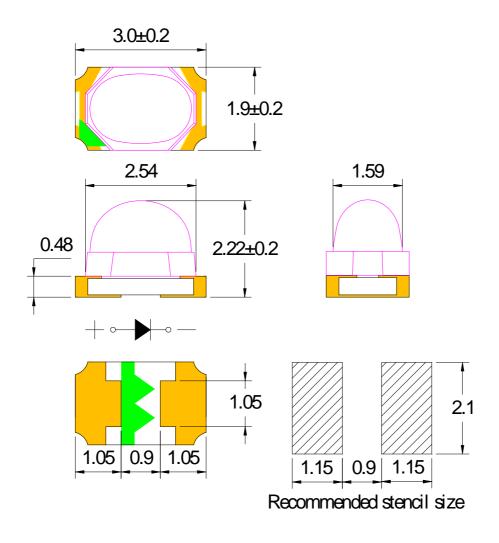

Notes:

Part No.	SL-T3020IRC050-L222-C-S	Page	2 of 9
----------	-------------------------	------	--------




LIGHT ELECTRONICS CO., LTD.




solute Maximum Ratings at Ta=25	r	
1. Storage and operating:		
2. Peak Forward Current:3. Caution in ESD:		
ort No. SL-T3020IRC050-L222-C-S		3 of 9

LTCH

LIGHT ELECTRONICS CO.,

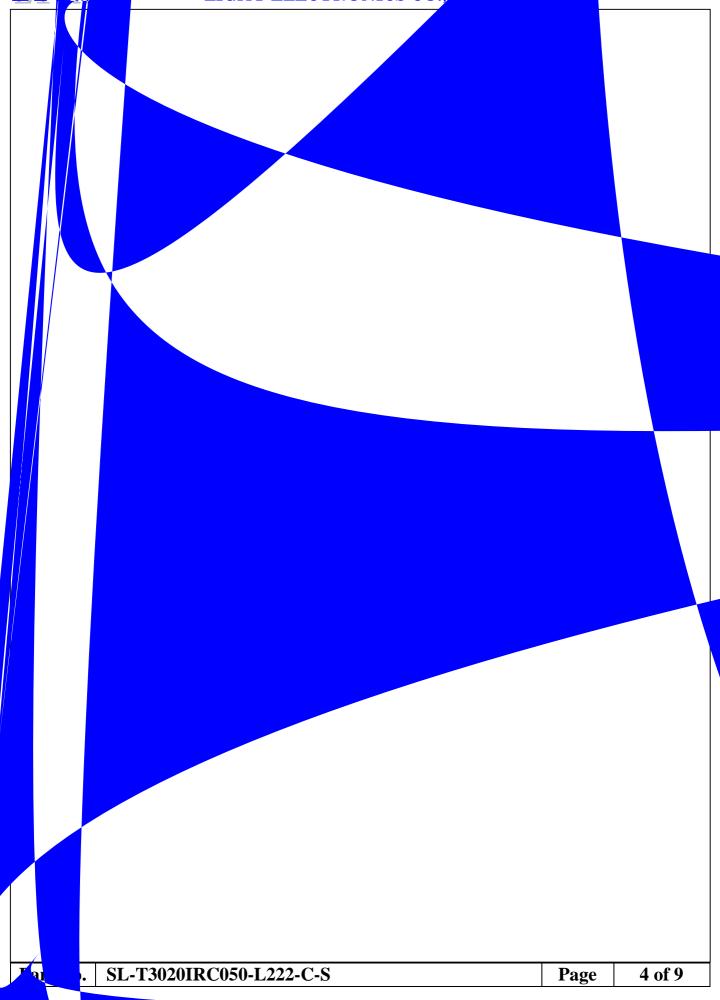

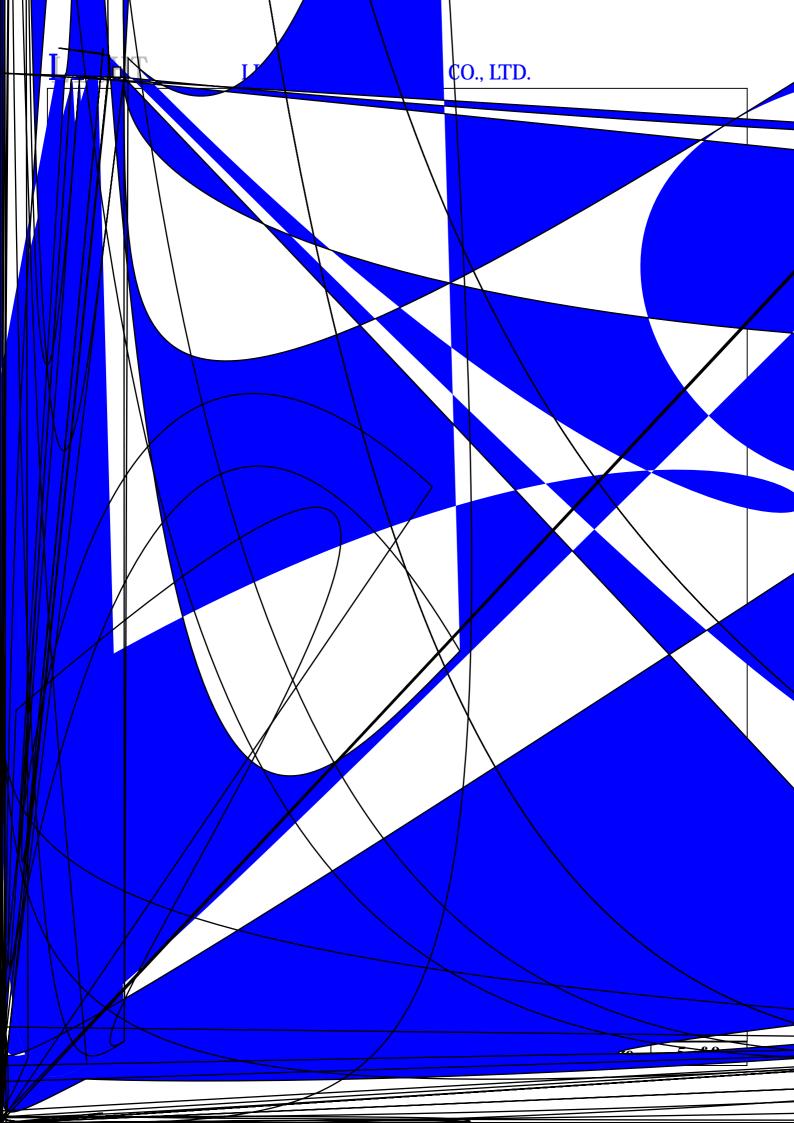


L	LIGHT ELECTRONICS CO., LTD.				
Part No.	SL-T3020IRC050-L222-C-S	Page	6 of 9		








Suggest IR Reflow Condition For Lead Free

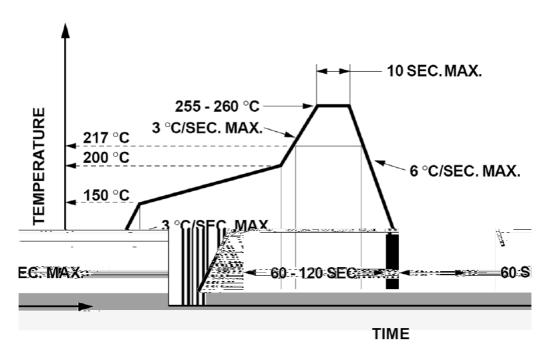

Soldering iron

Repairing

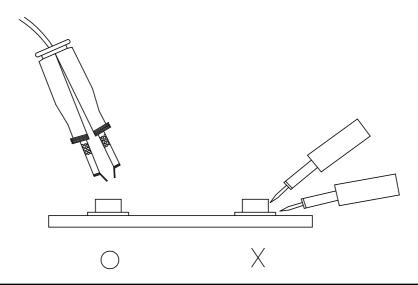

Part No. | SL-T3020IRC050-L222-C-S | Page | 9 of 9