



# SL-T4232IRC050-L380-C

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## Features

## Package Dimension




Notes:

### Absolute Maximum Ratings at Ta=25








1. Storage and operation instructions:

2. Peak Forward Current:

### Electrical Optical Characteristics at Ta=25


**Note:**

## Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

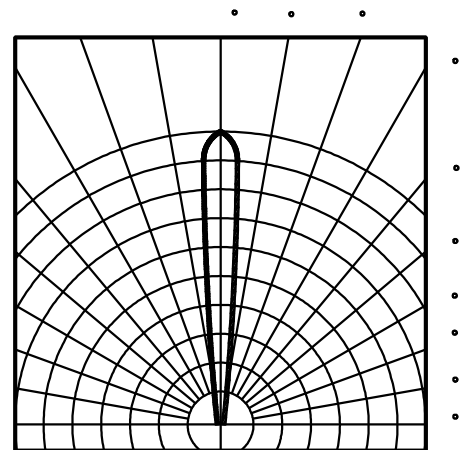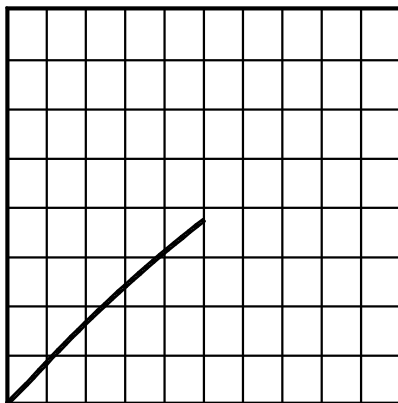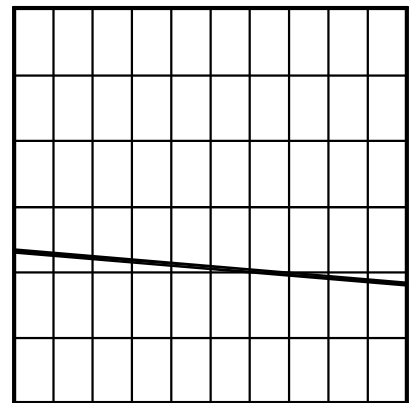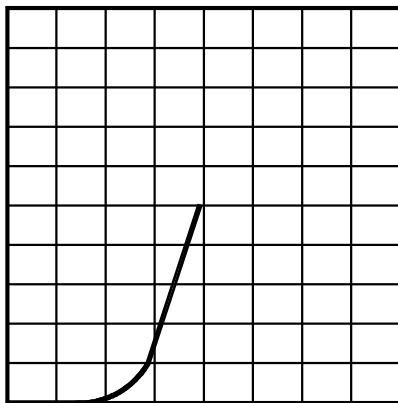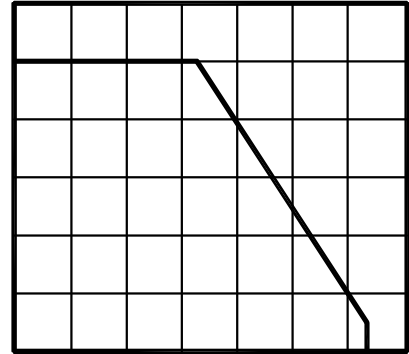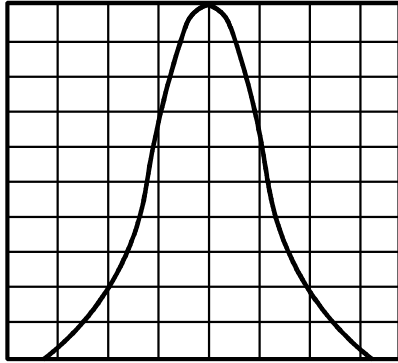

**B**                      **B**     **:**

<b>B</b> <b>=</b>	<b>F</b> <b>P</b>	<b>F</b> <b>P</b>

**NOTE**

E

**LIGHT**  
Light Electronics CO., LTD.

MODEL NAME: \_\_\_\_\_


QUANTITY: \_\_\_\_\_

BIN: \_\_\_\_\_

PACKING DATE: \_\_\_\_\_

REMARKS: \_\_\_\_\_

LOT NO.: \_\_\_\_\_



**LIGHT**  
Light Electronics CO., LTD.

MODEL NAME: \_\_\_\_\_


QUANTITY: \_\_\_\_\_

BIN: \_\_\_\_\_




PACKING DATE: \_\_\_\_\_

CUSTOMER P/N: \_\_\_\_\_

LOT NO.: \_\_\_\_\_




=

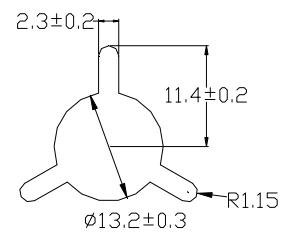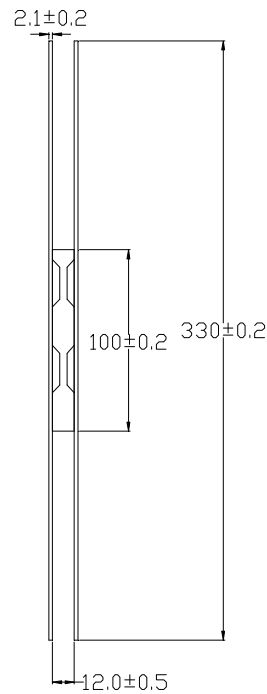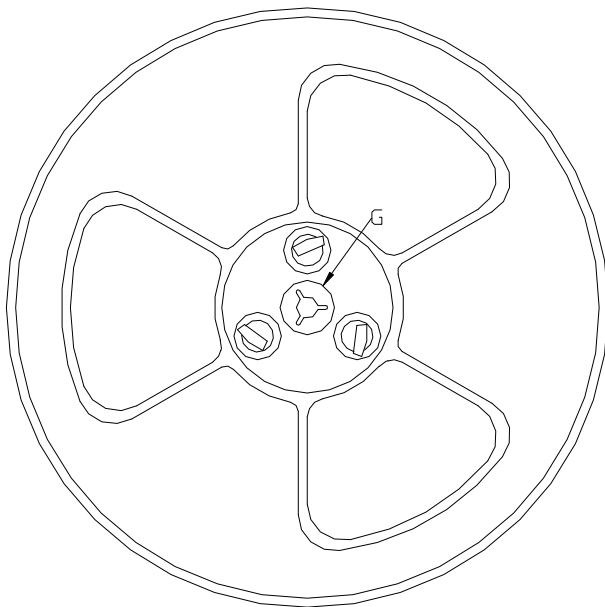

G 区放大图

Note:

