

# LG-05IR4D94C-003A-B-T

## DATA SHEET

SPEC. NO. : SZ21031301  
DATE : 2021/08/07  
REV. : A/1

Approved By:

Checked By:

Prepared By:



## Absolute Maximum Ratings at Ta=25°C

| Parameter                          | MAX.               | Unit |
|------------------------------------|--------------------|------|
| Power Dissipation                  | 200                | mW   |
| Continuous Forward Current         | 100                | mA   |
| Peak Forward Current <sup>*3</sup> | 200                | mA   |
| Reverse Voltage                    | 5                  | V    |
| Operating Temperature              | -40 to + 85        |      |
| Storage Temperature                | -40 to + 100       |      |
| IR Reflow Temperature              | 245 for 30 seconds |      |

### 1. Storage

The storage ambient for the LEDs should not exceed 30 °C temperature or 70% relative humidity.

It is recommended that LEDs out of their original packaging are used within three months.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant or in desiccators with nitrogen ambient.

### 2. Precautions in handling:

- When soldering, leave 2mm of minimum clearance from the resin to the soldering point.
- Dipping the resin to solder must be avoided.
- Correcting the soldered position after soldering must be avoided.
- In soldering, do not apply any stress to the lead frame particularly when heated.
- When forming a lead, make sure not to apply any stress inside the resin.
- Lead forming must be done before soldering.
- It is necessary to cut the lead frame at normal temperature.

### 3. Peak Forward Current:

Condition for is IFP pulse : At 1ms cycle, 50%duty, emitting 32kHz square wave signal.





## Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

Fig.1 Spectral Distribution

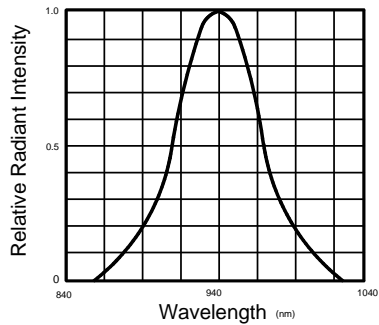


Fig.2 Forward constant current IF Vs Ambient Temperature

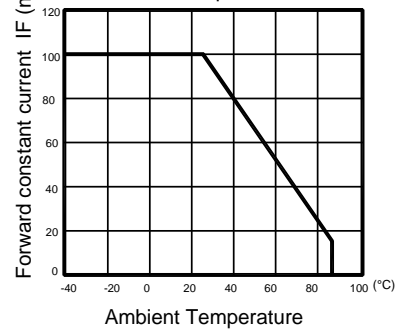


Fig.3 Forward Current Vs Forward Voltage

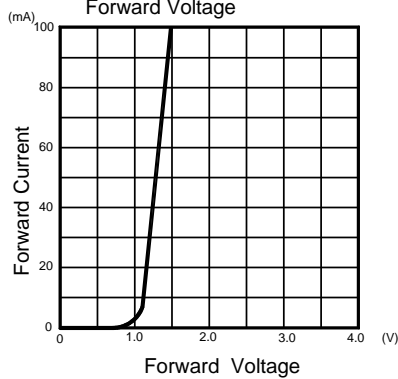


Fig.4 Relative Radiant Intensity Vs Ambient Temperature

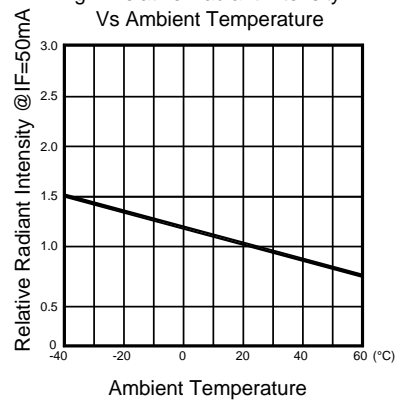


Fig.5 Relative Radiant Intensity Vs Forward Current

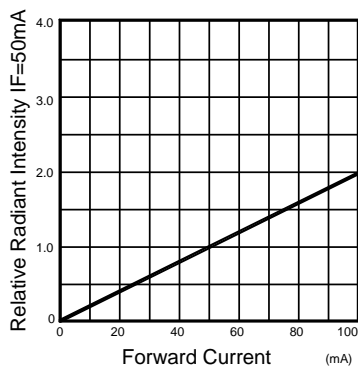


Fig.6 Radiation Diagram




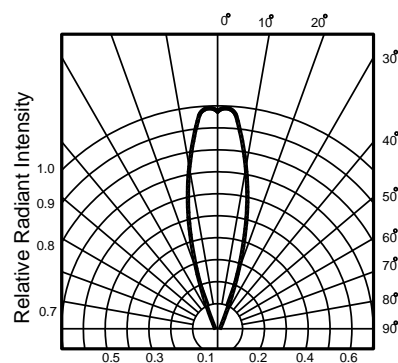


Fig.7 Forward pulse current Vs Ambient Temperature

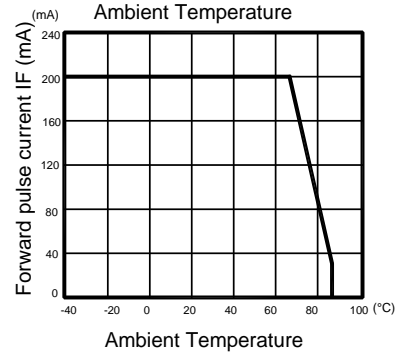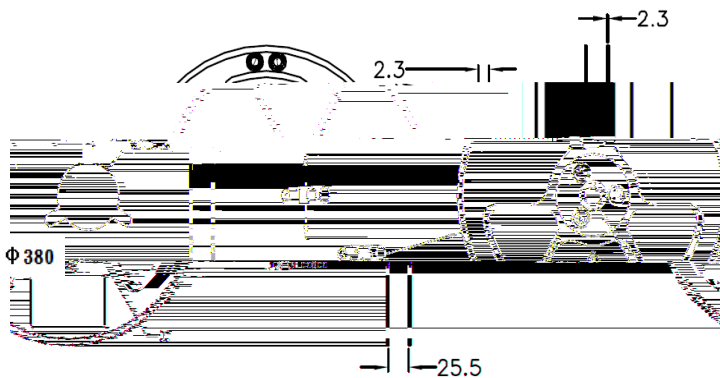

## Package

### Package Dimensions

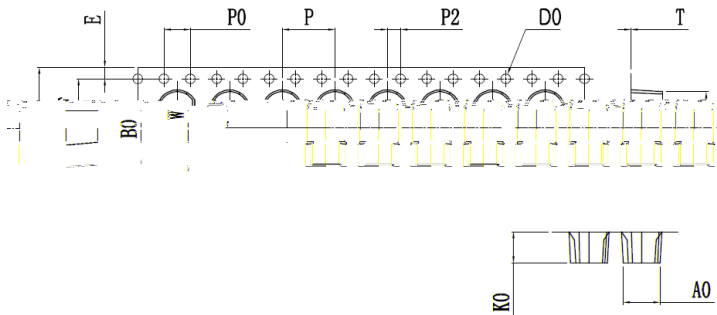

| Item  | Specification |         |
|-------|---------------|---------|
|       | Minum         | Maximum |
| W     | 15.97         | 16.3    |
| P     | 7.9           | 8.1     |
| E     | 1.65          | 1.85    |
| F     | 7.4           | 7.6     |
| D     | 1.5           | 1.6     |
| P0    | 3.9           | 4.1     |
| P0x10 | 39.8          | 40.2    |
| P2    | 1.9           | 2.1     |
| A0    | 5.2           | 5.4     |
| B0    | 10.6          | 10.8    |
| K0    | 4.8           | 5.0     |


### Notes:

1. All dimensions in millimeters.
2. All dimensions meet EIA-481-C requirements.
3. Cover tape by a heat sealing manner.

## Package Spec:

**1.2000pcs per reel .**

**15 reel per carton/Total 30000pcs per carton.**

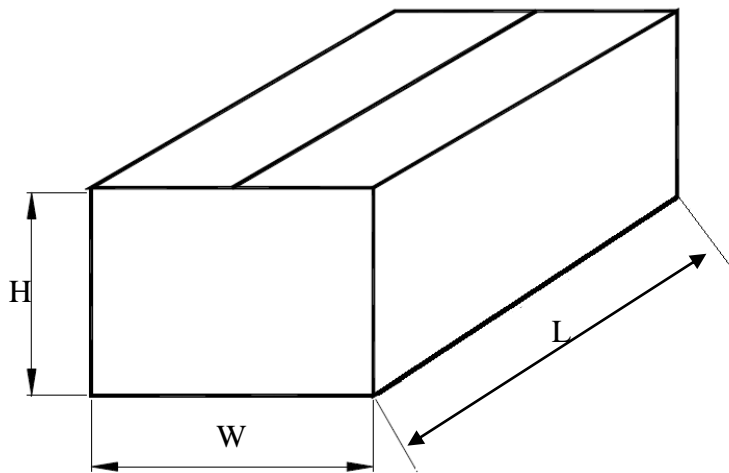

| Item | Specification |         |
|------|---------------|---------|
|      | minnum        | Maximum |
| L    | 465           | 475     |
| W    | 405           | 415     |
| H    | 405           | 415     |