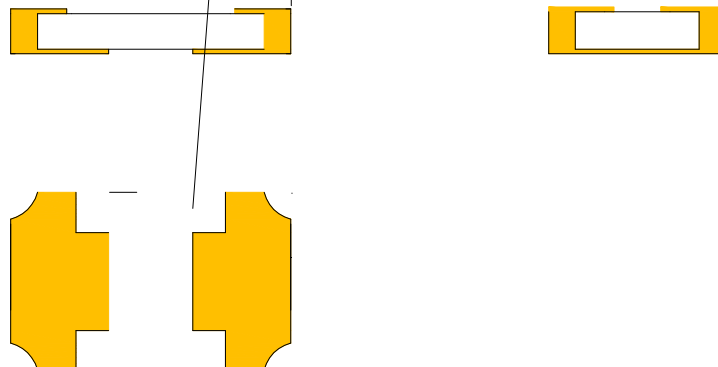


Features

Package Dimension



Notes:

Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit

1. Storage and operating:



2. Peak Forward Current:



Condition for is IFP pulse: Pulse Width 100µs and duty 1%.

3. Caution in ESD:

	22	26
	26	31.9
	31.9	37
	37	44
	44	53

NOTE

LIGHT Light Electronics CO., LTD	
MODEL NAME: _____	 LOT NO. : _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
REMARKS: _____	

LIGHT Light Electronics CO., LTD	
MODEL NAME: _____	 LOT NO. : _____
QUANTITY: _____	
BIN: _____	
PACKING DATE: _____	
CUSTOMER P/N: _____	

