



LI

LIGHT



LIGHT



Infrared Photo diode Specifications

Commodity: Infrared Photo diode


Reverse Light Current Bin Limits

BIN CODE	Min. (A)	Max. (A)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation


LIGHT Universal Label

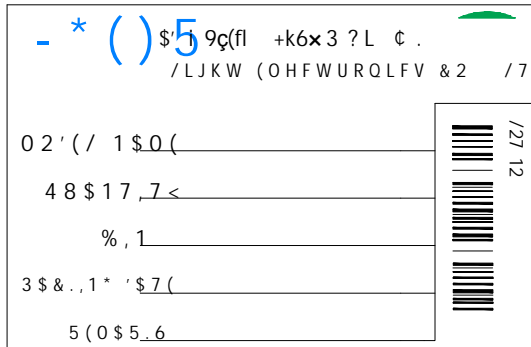

- * () \$ 5 9c(fl +k6x3 ?L ¢ .
 /LJKW (OHFWURQLFV &2 /7
 0 2 ' (/ 1 \$ 0 (_____
 4 8 \$ 1 7 , 7 < _____
 % , 1 _____
 3 \$ & . 1 * ' \$ 7 (_____
 5 (0 \$ 5 . 6 _____

127 12

Customer Defined Label



Ÿ ÷ ` -
 f H
 1 4Ÿ
 ; >ß U
 Ø m ` -

RoHS

Carrier Specifications (Loaded Quantities)

Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm

Moisture Resistant Packaging

